




Tool Holders & Adapters

- Adapter
- Backing pads
- ISO Cones
- Reducers
- Tool Holders



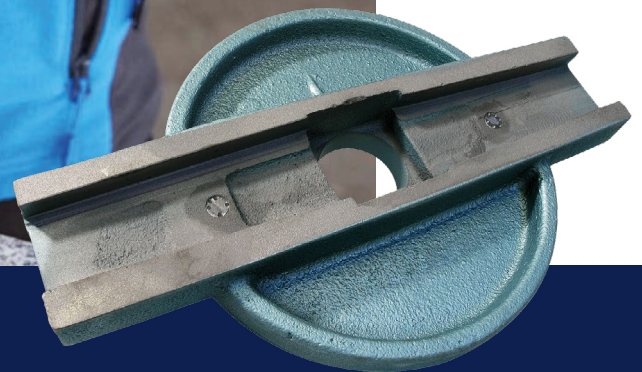

Discover our parts catalog for tool holders and adapters with a large selection of mounting options for your abrasives and cut-off wheels.

Our particularly stable and low-vibration adapters for end mills and extensions for hollow drills.

A wide range of mounting plates made from various materials with a large number of connection options offer flexibility and support.

Our range is supplemented by reduction rings, cone holders, mounting shoes, mounting plates and wedge segment plates for safe operation and precise results.

Adapter	5
Backing pads	9
ISO Cones	18
Reducers	21
Tool Holders	23

Quantity scale

3 pce	5%
5 pce	10%
10 pce	15%



Adapter for CNC milling rings

The extension for deep milling work with milling rings.

- Tool holder: 50 mm
- Model: Steel
- Bore mm: 50
- Usage: Wet

Article#	Working length mm
111715	100
109903	200

Adapter R1/2 female - M14 female

Precise short adapter for the use of Drillers on angle-grinders.

- Stable steel version
- Precise produced for perfect concentric runout



Quantity scale

2 pce	10%
3 pce	15%
5 pce	25%

Article#	Tool holder	Model	Usage
109198	M14	Stainless steel	Wet

Quantity scale

2 pce	10%
3 pce	15%
5 pce	25%



Adapter R1/2" for router bits M10

Universal solution for working with incremental router bits.

- Attachment R1/2" male to M14 female
- Toolside M10 with conic area for balanced processing

Article#	Tool holder	Model	Usage
118729	R1/2" + M14i	Steel	Wet

Tool Holders & Adapters

Adapter

Quantity scale

2pce 10%
3pce 15%
5pce 25%



Adapter R1/2" male - M12 female

Attachment for incremental router bits with reduced vibrations

- This adapter is made of very hard steel, to become very stable and to avoid vibrations.
- Incremental router bits with an M12-Screw (right sense) can be connected.
- The maximum cutting depth is 140 mm
- The diameter of the shaft is 19 mm
- Attachment R1/2" (right sense)
- Tool holder: R1/2"
- Usage: Wet
- Ø mm: 20

Article#	Working length mm	Model
109735	140	High Feast
107374	65	Stainless steel

Adapter R1/2" male - M14 female

Attachment for incremental router bits with reduced vibrations

- This adapter is made of very hard steel, to become very stable and to avoid vibrations.
- Incremental router bits with an M14-Screw (right sense) can be connected.
- The maximum cutting depth is 165 mm.
- The diameter of the shaft is 23 mm
- Attachment R1/2" (right sense)
- Tool holder: R1/2"
- Model: High Feast
- Usage: Wet
- Ø mm: 25

Quantity scale

2pce 10%
3pce 15%
5pce 25%



Article#	Working length mm
109901	135
109883	225

Quantity scale

2pce 10%
3pce 15%
5pce 25%



Adapter R1/2" male - M14 male

Short, rust protected adapter

- Stable and precise steel adapter
- Galvanic cover for rust protection
- Attachment R1/2" male (right sense)
- Reduced to M14 male (right sense)
- Drilled through for the watercooling of the tools

Article#	Tool holder	Model	Usage
108271	R1/2"	Steel	Wet

Quantity scale

2 pce 10%
3 pce 15%
5 pce 25%



Extension for core bits R1/2"

For easy extension of drill bits.

- Can be used for drill bits from diameter 30 mm
- Tool holder: R1/2"
- Model: Steel
- Usage: Wet

Article#	Working length mm	Ø mm
103445	100	8,8
103446	200	30
103447	300	30
105694	500	30

Flange adapter 44 mm M14 for dry cutting discs

Light flange adapter allows to create notches simply

- For the use of flush mounted dry cutting blades
- Suitable for bore 22,2 mm
- 3 fixing holes M4
- Tool holder: M14
- Ø mm: 44



Quantity scale

2 pce 10%
5 pce 25%

Article#	Model
105450	Aluminum
106453	Steel

Tool Holders & Adapters

Adapter

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%
20 pce 45%



Flange adapter 80 mm 22,2 for dry cutting discs

Light flange allows to create notches simply

- Attachment-hole 22,23 mm
- For the use of flush mounted dry cutting blades
- Suitable for bore 55 mm
- 6 fixing holes M5
- Tool holder: 22,2 mm
- Ø mm: 80

Article#	Model
105449	Aluminum
107351	Steel

Flange adapter 80 mm M14 for dry cutting discs

Light aluminum-flange allows to create notches simply


- For the use of flush mounted dry cutting blades
- Suitable for holes 22,2 mm
- Very light
- 6 fixing holes M5
- Tool holder: M14
- Ø mm: 80

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%
20 pce 45%



Article#	Model
105448	Aluminum
107352	Steel

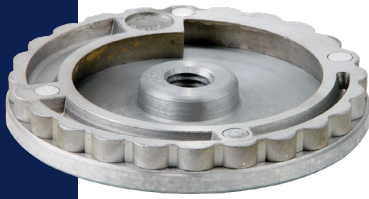

Backing pad aluminum M14-snail lock

Rigid plate with threaded mount without damping.

Article#	Damping layer	Tool holder	Base body	Ø mm
111871	-	M14	Aluminum	100

Backing pad for lamb skin hood

For mounting lambskin hoods 190mm.

- Use mounting plate #104285 to mount lambskin hoods 125mm



Quantity scale

2 pce 10%
5 pce 25%
15 pce 35%

Article#	Damping layer	Tool holder	Base body	Ø mm
104289	Sponge rubber	M14	PVC	160

Quantity scale

2 pce 10%
5 pce 20%
10 pce 30%
15 pce 35%



Backing pad Frankfurt-velcro

- Suitable for resin-bonded diamond pads

Article#	Tool holder	Model	Usage
103440	Frankfurt	Plastic	Wet

Tool Holders & Adapters

Backing pads

Quantity scale

2 pce 10%
5 pce 25%
15 pce 35%



Backing pad M14 for fiber discs

- Thread M14
- Tool holder: M14
- Base body: PVC
- Damping layer: -

Article#	Ø mm
104287	115
104288	178

Backing pad PVC 1/4"-velcro

- Suitable for Dia-Microglanz dry and Dia-Zec Ø 50 mm
- Suitable for compressed air angle grinder GP824AS



Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%

Article#	Damping layer	Tool holder	Base body	Ø mm
106959	-	W 1/4"-20	PVC	50

Quantity scale

2 pce 10%
5 pce 25%



Backing pad PVC M14-velcro

- Suitable for resin-bonded diamond pads
- Extra thin version
- Tool holder: M14
- Base body: PVC
- Damping layer: -

Article#	Ø mm
120068	100
103346	115
105455	120
123145	150
107079	175

Backing pad PVC M14-velcro Superhaft

- Suitable for resin-bonded diamond pads
- Tool holder: M14
- Base body: PVC
- Damping layer: -



Quantity scale

2 pce 10%
5 pce 25%
15 pce 35%
30 pce 45%

Article#	Ø mm
127922	98
105524	115
108665	120

Tool Holders & Adapters

Backing pads

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%



Backing pad PVC snail lock-velcro

- Also suitable for „Kolb“ machines
- Hard version for resin-bonded diamond pads
- Tool holder: Snail lock
- Base body: PVC
- Damping layer: -

Article#	Ø mm
103433	100
107856	125
103438	150

Backing pad PVC with damping M14-velcro

- Suitable for resin-bonded diamond pads
- Tool holder: M14
- Base body: PVC
- Damping layer: Sponge rubber



Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%

Article#	Ø mm
121090	100
104285	115
104286	120
105720	125
111864	180

Quantity scale

2 pce 10%
5 pce 25%
15 pce 35%
30 pce 45%



Backing pad PVC with damping M14-velcro Superhaft

- Suitable for resin-bonded diamond pads
- System velcro Superhaft

Article#	Damping layer	Tool holder	Base body	Ø mm
138325	Sponge rubber	M14	PVC	120

Backing pad PVC with damping snail lock-velcro

- Suitable for resin-bonded diamond pads



Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%

Article#	Damping layer	Tool holder	Base body	Ø mm
103431	Sponge rubber	Snail lock	PVC	100

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%



Backing pad rubber high-flexible M14-velcro

- Highly flexible
- Suitable for internal rounding
- Suitable for resin-bonded diamond pads

Article#	Damping layer	Tool holder	Base body	Ø mm
103430	-	M14	Rubber	100

Tool Holders & Adapters

Backing pads

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%



Backing pad rubber M14-velcro

- Suitable for resin-bonded diamond pads
- Tool holder: M14
- Base body: Rubber
- Damping layer: -

Article#	Ø mm
106256	75
103429	100

Backing pad rubber with damping M14-adhesive system

Quantity scale


2 pce 10%
5 pce 25%
15 pce 35%



Article#	Damping layer	Tool holder	Base body	Ø mm
104282	Sponge rubber	M14	Rubber	120

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%

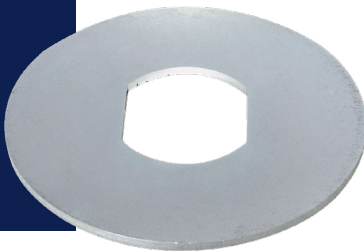

Backing pad steel magnet-velcro

- Suitable for magnetic couplings

Article#	Damping layer	Tool holder	Base body	Ø mm
103432	-	Magnet	Stahl	100

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%



Backing pad Ø 100 mm M14 plastic-velcro

- Hard Plastic for Dia-resin
- Water distribution

Article#	Damping layer	Tool holder	Base body	Ø mm
106304	-	M14	PVC	100

Easy-Quick adapter plate 100 mm sponge velcro

The magnet system enables a velcro-friendly, easy and quick change of the receiving plates.

- Adapter plate 100 mm
- Sponge rubber
- Suitable for resin-bonded diamond pads
- Suitable for dry & wet use



Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%

Article#	Tool holder	Model	Ø mm
137565	Easy Quick	Foam rubber	100

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%



Easy-Quick Adapter plate 100 mm velcro

The magnetic system enables a Velcro-friendly, simple and quick change of the mounting pads. These increase the longevity of the Klett, since the change of the grinding pads between the work steps is not necessary.

- 2 driving pins
- Suitable for resin-bonded diamond pads
- Suitable for dry & wet use

Article#	Tool holder	Ø mm
125812	Easy Quick	100

Tool Holders & Adapters

Backing pads



Easy-Quick adapter set 100 mm

The magnet system enables a velcro-friendly, simple and quick change of the receiving plate.

Includes:

- 1x base plate aluminum Ø 100 M14
- 8x adapter plates Ø 100 Velcro
- Suitable for resin-bonded diamond pads
- Suitable for dry & wet use

Article#	Tool holder	Ø mm
125820	M14	100

Easy-Quick basic adapter plate 100 mm M14


The magnet system enables a velcro-friendly, simple and quick change of the receiving plate.



Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%

Article#	Tool holder	Ø mm
125810	M14	100



Easy-Quick sponge adapter set 100 mm

The magnet system enables a velcro-friendly, simple and quick change of the receiving plate.

Includes:

- 1x base plate aluminum Ø 100 M14
- 8x adapter plate Ø 100 sponge rubber Velcro
- Suitable for resin-bonded diamond pads
- Suitable for dry & wet use

Article#	Tool holder	Ø mm
138973	M14	100

Quantity scale

2 pce 10%
5 pce 25%
10 pce 35%



Sponge rubber damping layer velcro-velour

- Suitable for resin-bonded diamond pads
- Tool holder: Velcro

Article#	Ø mm
103441	100
105576	125

Vibrostop M14

- Attachment plate for grinding wheels with SF-lock
- Rubber-mounted attachment plate for vibration damping
- Base body: Aluminum
- Damping layer: Rubber



Quantity scale

2 pce 10%
5 pce 20%
10 pce 25%

Article#	Ø mm
104274	100
130038	130

Tool Holders & Adapters

ISO Cones

Quantity scale

2 pce 10%
3 pce 15%
5 pce 25%




Cone holder ISO40 for Inter- mac BAZ

- ISO40 holder suitable for Intermac
- In stainless steel design
- Tool holder: ISO40
- ISO: 40
- Machine: Intermac


Article#	Tool holder
111268	D22 L34 mm
111269	D22 L47 mm
123965	D22 L80 mm
108781	D45 L200 mm
112634	R1/2"

Flange for spigot 22 mm mandrel lengthening

- Stainless steel
- For screws M10



Article#	Outer Ø mm	Inner Ø mm
149489	50	22



Flange for spigot 22 mm mandrel shortening

- Stainless steel
- For screws M10

Article#	Outer Ø mm	Inner Ø mm
149488	50	22

Flange for spigot 35 mm mandrel lengthening

- Stainless steel
- For screws M10



Article#	Outer Ø mm	Inner Ø mm
149491	50	35



Flange for spigot 35 mm mandrel shortening

- Stainless steel
- For screws M10

Article#	Outer Ø mm	Inner Ø mm
149490	50	35

Tool Holders & Adapters

ISO Cones

Quantity scale

2 pce	5%
3 pce	10%
5 pce	15%



Tightening bolt for cone holder ISO40

- For Intermac machines

Article#	ISO	Machine
107950	40	Intermac

Tool clamp PVC for ISO40 cones from Intermac


- Suitable for Master 23, 33, 35, 45 - P1414P0149



Article#	Tool holder
109050	ISO40

Quantity scale

2 pce 5%
3 pce 10%
5 pce 15%

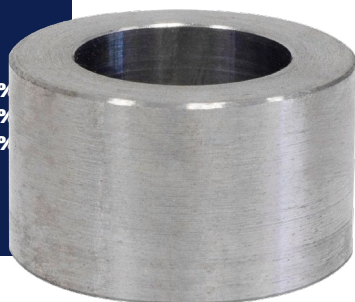

Reducer for tool grinding wheels

For easy and safe reduction of the mounting hole.

- Knurled outer area for a secure hold
- Easy to fit
- Precise drilling
- Model: Steel
- Outer Ø mm: 32

Article#	Inner Ø mm	Width mm
102818	16	19
102817	20	19
112982	20	9

Tool Holders & Adapters

Reducers

Quantity scale

2 pce 10%
3 pce 15%
5 pce 25%
10 pce 35%



Reducers for saw blades and milling wheels


For easy and safe reduction of the mounting hole.

- Knurled outer area for a secure hold
- Easy to fit
- Precise drilling
- Model: Steel

Article#	Outer Ø mm	Inner Ø mm	Width mm
103506	22,2	20	1
107167	30	20	1,8
103508	30	22,2	1,6
103509	30	25	1,6
103510	30	25,4	1,6
103511	50	30	1,8
103512	50	30	4
103513	50	40	3,5
103514	60	25,4	1,8
103516	60	30	2,5
109943	60	35	2,5
103517	60	40	2,5
103518	60	50	1,8
103519	60	50	2,5
103520	60	50	3,4
107075	60	50	4,5
109708	60	50	15
103521	80	60	3,5
103523	100	60	5
103526	100	80	4,5

Quantity scale

2 pce	5%
3 pce	10%
5 pce	15%

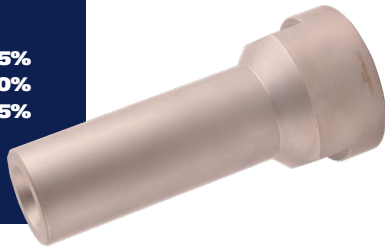

Adapter M48x3 left on R1/2" left

Adapter for tools with R1/2"

- M48x3 left-hand thread female for Donatoni-machines
- R1/2" left-hand thread female
- Stainless steel

Article#	Working length mm
115979	110
132108	172
132058	252

Adapter M48x3 left on R1/2" right with locking

- M48x3 left-handed thread female to R1/2" right-handed thread female
- Total length 80mm with locking
- Stainless steel
- Tool holder: M48x3 left
- Machine: Donatoni




Quantity scale

2 pce	5%
3 pce	10%
5 pce	15%

Article#	Working length mm	Working length mm
115672	32	32
136065	62	62

Tool Holders & Adapters

Tool Holders

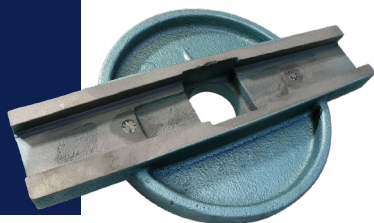

Fickert adapter plate

To accommodate the wobble head segments. Articulated arm grinding machines or automatic grinding machines.

- Tool holder: 50 mm-2 Stud bolts M12 TK 175 mm
- Number of segments: 2

Article#	Ø mm	Segment length mm
107325	140	90
107326	250	140

Flexible rubber coupling 60mm

- Tool holder with vibration damping
- The maximum rate of duty is 4000 rpm
- Attachment machine side out of brass
- Ø mm: 60
- Thread: M14female/M14male



Quantity scale

2pce 10%
5pce 20%
10pce 25%

Article#	Thread length mm
108805	10
109044	15

Quantity scale

2pce 10%
5pce 20%
10pce 25%



Flexible rubber coupling 75mm

- Tool holder with vibration damping
- The maximum rate of duty is 4000 rpm
- Attachment machine side out of brass
- Tool side made of steel

Article#	Thread	Thread length mm	Ø mm
104305	M14female/M14male	7	75

Quantity scale

2 pce 10%
5 pce 15%
10 pce 25%



Flexible rubber coupling M14 female-magnet

- Tool holder with vibration damping for Tornado system
- Tool holder: M14

Article#	Ø mm	System	Ø mm/Model
108104	60	Lockable	60/
104300	75	Lockable	75/
126228	75	Not lockable	75/

Frankfurt adapter plate

- Adapter M48x3 left-handed thread female to spring loaded type Frankfurt Ø320mm
- For Donatoni machines



Quantity scale

2 pce 5%
3 pce 10%
5 pce 15%

Article#	Tool holder	Machine
115311	M48×3 left	Donatoni

Frankfurt adapter shoe

- 3 holes for countersunk head screws M10



Article#	Model
103949	Aluminum

Tool Holders & Adapters

Tool Holders

Quantity scale

2 pce 10%
5 pce 25%
15 pce 35%



Frankfurt adapter shoe

- 3 holes for countersunk head screws M10

Article#	Model
104808	Plastic

Frankfurt holder aluminum

- Accessories for Form Frankfurt Type 09/11
- Tool holder: Frankfurt
- Material: Aluminium



Quantity scale

2 pce 10%
5 pce 20%
10 pce 25%

Article#	Model
103947	Left
103946	Right

Quantity scale

2 pce 10%
5 pce 20%
10 pce 25%



Frankfurt holder PVC

- Accessories for Form Frankfurt Type 09
- Tool holder: Frankfurt
- Material: Plastic

Article#	Model
103944	Left
103945	Right

Quantity scale

2pce 10%



Munchen adapter plate 250mm

For use on wall arm & floor sanding machines.

Article#	Number of segments	Tool holder	Base body	Ø mm
104180	5	50 mm-2 Stud bolts M12 TK 175 mm	PVC	250

OSC triangle attachment 80 mm 2-pack

For holding diamond paper in triangular shape.



Article#	Tool holder	Base body	Length mm
104211	Velcro	Aluminum	80

Quantity scale

2pce 10%
5pce 15%



Terzago tool holder 100mm

Article#	Tool holder	Base body	Ø mm
105564	M30	Aluminum	100

Tool Holders & Adapters

Tool Holders

Quantity scale

2 pce 10%

5 pce 25%

10 pce 35%



Velcro adhesive 1000x210mm

- For independent cutting
- With water-resistant adhesive

Article#	Measures mm	Tool holder
113833	1000×205	Adhesive

Notice

[illegible]

Adapter	5,6,23,25
Adapter plate	24,27
Adapter shoe	25,26
Backing pad	9,10,11,12,13,14,15
Cone holder	18
Core drill extension	7
Damping layer	17
Easy-Quick	15,16
Flange	18,19
Flange adapter	7,8
Flexible rubber coupling	24,25
Holder Frankfurt	26
OSC adapter	27
Reducer	21,22
Tightening bolt	20
Tool clamp	20
Velco	28
Vibrostop	17

Still haven't found what you're looking for?

There is even more choice and offers at weha.com



Order before 3 pm
for same day dispatch





Secure shopping
thanks to SSL encryption



Parcel shipping free
except packing costs

Quick help
via chat function





Contact details:
weha Ludwig Werwein GmbH
Wikingerstr. 15
DE-86343 Königsbrunn

+49(0)8231 | 6007-0
info@weha.com
www.weha.com



Subject to errors, changes and technical developments.

August 2024

Only valid while stocks last.