



# Material Handling

- Working & Assembly Tables
- Containers
- Rotating & Mounting Trestles
- Vacuum Lifters
- Slab Lifters
- Lifting Straps & Belts
- Other Lifting Equipment
- Load Securing
- Slab & Cut Stone Racks
- Portal & Jib Cranes
- Racks & Stacking Cylinders
- Forklift Attachments
- Transport Racks
- Transport Rollers & Trolleys







Welcome to the weha catalog for transport & storage in the natural stone industry - With us as your reliable partner for high-quality solutions that guarantee stability and safety.

Discover our wide range of processing tables, a wide variety of bins and containers, trestles, vacuum lifters and slab grabs, as well as gantry and jib cranes for workshops and cemeteries. Our products have been specially developed to meet the demanding challenges of the natural stone industry and are characterized by their high load-bearing capacity and durability.

In addition, we offer racks, forklift attachments, transport racks and transport rollers that enable safe storage and smooth transportation.

With our own European production facilities, we are also happy to supply you with customized solutions. Please do not hesitate to contact us!

Working & Assembly Tables _____	5
Containers _____	8
Rotating & Mounting Trestles _____	10
Vacuum Lifters _____	14
Slab Lifters _____	27
Lifting Straps & Belts _____	33
Other Lifting Equipment _____	36
Load Securing _____	40
Slab & Cut Stone Racks _____	44
Portal & Jib Cranes _____	47
Racks & Stacking Cylinders _____	54
Forklift Attachments _____	56
Transport Racks _____	58
Transport Rollers & Trolleys _____	62



## Angle connection 0 to 90° for Zip Elephant

With the help of the angle connection, the Weha work tables Zip Elephant can be easily connected. This connection results in countless combination possibilities.

Article#

148015

## Manual tilting transport cart

Robust frame construction in tiltable design. Tilting takes place via a practical swivelling gear (with crank). Support surface with PVC castors. Can be used for different table heights.

- Infinitely height-adjustable using ratchet crank



Article#	Support surf. mm	Tires mm	Height mm	Capacity kg
104522	2160×1410	260×85	790-950	800



## Mobile tiling table

Wooden construction for cutting/processing tiles in XXL format.

- Lacquered wooden trestles with feet can be levelled up to 70 mm
- Insertable alignment slats for length adjustment and stabilisation
- Table top can be screwed to wooden trestles
- Waterproof 18 mm screen-printed board
- Optimum support surface for all tile formats
- All stop and cutting rulers can be inserted individually
- Can also be assembled and dismantled by just one person

Article#	Width mm	Height mm	Length mm
142834	1770	790-860	3200



### Tilting device ROTO II - hand hydraulic

Special table for fast and safe turning of kitchen tops.

- Ideal for cutting and gluing reinforcements
- Adjustable height of the table by manual pump
- 4 pieces widening elements for large-area workpieces

Article#	Width mm	Height mm	Length mm	Capacity kg
143728	1190	895	2000	500

### Work and gluing table Zip Elephant

The Zip Elephant worktable impresses with its high level of flexibility. The sliding cross struts mean that even workpieces with cutouts can be easily processed.

- Width mm: 600
- Height mm: 850-1100
- Capacity kg: 400



#### Quantity scale

- 3 pce 10%
- 5 pce 15%
- 10 pce 20%

Article#	Weight kg	Length mm
148022	68	1500
147512	70	2000
148023	85,9	2400

#### Quantity scale

- 3 pce 10%
- 5 pce 15%
- 10 pce 20%



### Workbench Kitchenboy

The ideal working table for kitchen countertops, vanity tops, counter tops etc. Variable height adjustment by handle, tilt adjustment up to 85 ° in both directions by a swivel gear.

- Distribution of individual wooden coverings possible
- For the processing of interior cutouts
- Material safety when tilted
- Adjustable positioning guide
- Stand width 1000 mm

Article#	Tires mm	Width mm	Height mm	Length mm	Capacity kg
107654	200	670	650-1060	2000	250



## Worktable Sisar

Very agile assembly table with fully galvanized surface. Due to the centrally mounted scissor elements the table can be mounted on individual size of the stone slab can be set. Due to its ingenious construction, this assembly table is easy to transport and storage very space-saving.

- Fully galvanized
- 4x swivel castor Ø160 mm incl. parking brake
- Height continuously adjustable 890-1175 mm
- Width continuously adjustable 420-1600 mm
- Depth 750 mm
- Space-saving construction on min.420×890 mm possible
- Rubber pad 100×750 mm

Article#	Tires mm	Capacity kg
145471	160	400

## Worktable Vario

Individually adjustable for all areas of application. Support area with special non-marking rubber, stop rail for better material fixation.

- Height adjustable work rest
- Length adjustable by hand crank 800-1300 mm
- Height-adjustable holding devices for window sills, steps, etc.



### Quantity scale

**3 pce 10%**  
**5 pce 15%**  
**10 pce 20%**

Article#	Tires mm	Height mm	Length mm	Capacity kg
107401	160	1090	1300	400



## Worktable with screen printing top

- Dimensions: 1800×800×800-1000 mm (height-adjustable)
- Load capacity up to max. 200 kg
- Incl. 2x swivel castors, 2x fixed castors Ø125 mm

Article#	Width mm	Weight kg	Height mm	Length mm
152564	600	70	850-1100	2000

# Material Handling Containers

## Quantity scale

2 pce 10%



## Big-Bag (5 pcs.)

Useable for stone waste, paving stones, sand, grit, gravel.


- Low net weight
- High tear resistance
- Fully recyclable

Article#	Width mm	Height mm	Length mm	Capacity kg
123807	900	900	900	1500

## Dumper shovels

For clearing stone debris and snow. Fits any fork length, unlocked via cable pull. Automatic locking when lowering. A chain secures the bucket against slipping off the forks.

- Painted finish
- 5mm sheet steel
- Tilttable

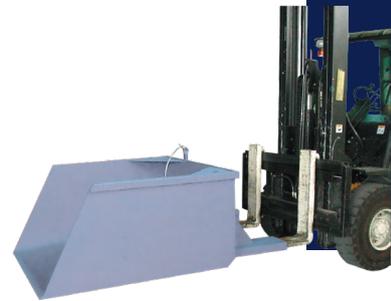

Article#	Width mm	Fork openings mm	Height mm	Length mm	Capacity kg
104530	1000	155×60	500	1000	1200
104531	1300	200×70	750	1500	1500

## Quantity scale

2 pce 10%  
3 pce 15%



## Hinged container

Solves any waste problem quickly and cleanly. Emptying is done by operating a lever via 2 split flaps at the bottom.

- Solid sheet steel
- Hot-dip galvanised design

Article#	Width mm	Height mm	Length mm	Capacity kg	Volume m <sup>3</sup>
105088	1000	700	1000	1000	0,7
105438	1250	1000	1250	1200	1,25



### Mobile tipping container

For the disposal of natural stone waste in businesses. Suitable for any forklift and any fork length. Unlocking via cable pull. Automatic locking when lowering. Safety chain to prevent slipping off the forks.

- Hot-dip galvanised design
- Solid sheet steel
- Tilttable

Article#	Width mm	Height mm	Length mm	Capacity kg	Volume m <sup>3</sup>
105412	1050	1120	1150	800	0,6

### Mobile tipping container

For the disposal of natural stone waste in businesses. Suitable for any forklift and any fork length. Automatic locking when lowering. Safety chain to prevent slipping off the forks.

- Hot-dip galvanised design
- Solid sheet steel
- Tilttable



#### Quantity scale

2 pce 10%  
3 pce 15%

Article#	Width mm	Height mm	Length mm	Capacity kg	Volume m <sup>3</sup>
109569	980	740	1450	1500	0,8

#### Quantity scale

2 pce 10%  
4 pce 15%  
6 pce 25%



### Mortar bucket

For transporting ready-mixed mortar, soil or sand.

- Craneable
- Foldable crane eyes
- Calibrated, recyclable, GS-tested
- Particularly stable, all-round steel frame
- High-strength, frost-resistant special plastic

Article#	Width mm	Height mm	Length mm	Volume l
105295	660	470	1000	200
119864	750	560	1065	250
111240	700	740	1050	333

# Material Handling

## Rotating & Mounting Trestles

### Quantity scale

2 pce 10%  
3 pce 15%  
5 pce 20%



### Engraving trestle hydraulically adjustable

Lift by hand hydraulic pump. Working angle approx. 75°, ensuring an upright, ergonomically correct working position. Safety device to prevent unintentional lowering of the workpiece. Lift adjustment for optimum loading.

- Maximum stone height 1560 mm
- Width adjustable 1100-1560 mm

Article#	Width mm	Height mm	Capacity kg
105432	1000	1700	1000

### Extension for fixing the spindle lock for trestles Saturn/Star/Komet/Venus

Extension for easy spindle locking for trestles.

Makes it easier to lock the spindle. Locking under the plate is no longer necessary. Suitable for Saturn/Star/Komet/Venus



Article#	Length mm
147998	350



### Sculptors modelling stand

The swivel chair can be folded up quickly and can be adjusted in height using a crank. The worktop can also be tilted.

- Galvanised
- Stand width and height adjustable
- Support can be swivelled and tilted

Article#	Support surf. mm	Height mm	Horiz. kg	Vert. kg
102756	325×325	918-1293	150	75

### Quantity scale

- 4 pce 10%
- 6 pce 15%
- 8 pce 20%



## Timber jack 1090 mm

Universally applicable for many workshop activities.

- Solid spruce
- Glued and additionally screwed

Article#	Width mm	Height mm	Length mm	Capacity kg
104554	750	700	1090	1000

## Timber jack 800 mm

Universally applicable for many workshop activities.

- Solid spruce
- Glued and additionally screwed
- Stand width 600 mm



### Quantity scale

- 4 pce 10%
- 6 pce 15%
- 8 pce 20%

Article#	Width mm	Height mm	Length mm	Capacity kg
114344	580	700	800	1000



## Trestle E-Maxx

The swivel trestle in a new guise. Thanks to the innovative electric height adjustment, gravestones can be handled safely without having to turn the support plate. Any desired height can be set at the touch of a button.

- Operation via 230 volts
- Support surface 750×750mm
- 2 wooden supports
- 2 fixed castors / 2 swivel castors
- Lacquered surface

Article#	Capacity kg
152767	800

# Material Handling

## Rotating & Mounting Trestles

### Quantity scale

3 pce 10%  
5 pce 15%  
10 pce 20%



### Trestle Heavy Load

Solid design for the heaviest pieces, including drawbar.

- Powder-coated surface
- 2 solid rubber fixed castors Ø 200 mm
- 2 solid rubber swivel castors Ø 200 mm with brakes

Article#	Support surf. mm	Height mm	Footprint mm	Capacity kg
104525	650x650	630-890	800x800	1500

### Trestle Komet

Extremely stable thanks to the arrangement with 5 feet.

- Powder-coated surface
- 2 fixed castors Ø 200 mm
- 3 swivel castors Ø 200 mm with brakes
- The drawbar enables easy and safe manoeuvring
- With plug-in option for pneumatic hammers.



### Quantity scale

3 pce 10%  
5 pce 15%  
10 pce 20%

Article#	Support surf. mm	Height mm	Footprint mm	Capacity kg
108377	500x500	620-950	700	800

### Quantity scale

3 pce 10%  
5 pce 15%  
10 pce 20%



### Trestle Maxx hydraulic

Extremely fast height adjustment thanks to its hydraulic system, extremely stable with 5 feet. Adjustment is by means of a foot pedal. The folding drawbar facilitates manoeuvring under load. The position of the stone is not changed when the height is adjusted.

- Hydraulic
- Powder-coated surface
- 2 fixed castors Ø 200 mm
- 3 swivel castors Ø 200 mm with brakes

Article#	Support surf. mm	Height mm	Footprint mm	Capacity kg
135035	500x500	600-950	700	800

### Quantity scale

- 3 pce 10%
- 5 pce 15%
- 10 pce 20%



## Trestle Saturn Extra

Extremely stable frame construction with swivelling table top and rubber pad (absorbs vibrations). The trapezoidal spindle enables infinitely variable height adjustment. Each height and rotation can be locked with a clamping device.

- Extra-strong trapezoidal spindle
- Powder-coated surface
- 2 elastic smooth-running fixed castors Ø 200 mm
- 2 elastic smooth-running swivel castors Ø 200 mm with brakes

Article#	Support surf. mm	Height mm	Footprint mm	Capacity kg
104524	500×500	560-930	700×650	1000

## Trestle Star

Extremely stable frame construction with swivelling table top and wooden support. The trapezoidal spindle enables infinitely variable height adjustment. Each height and rotation can be locked with a clamping device.

- 2 wooden supports
- Extra-strong trapezoidal spindle
- Powder-coated surface
- 2 fixed castors Ø 200 mm
- 2 swivel castors Ø 200 mm with brakes



### Quantity scale

- 3 pce 10%
- 5 pce 15%
- 10 pce 20%

Article#	Support surf. mm	Height mm	Footprint mm	Capacity kg
104523	500×500	560-930	670×640	750



## Work and turn buck

Work trestle for placing workpieces for easy processing. Additional option for easy turning of workpieces.

- Sturdy steel construction
- Galvanised
- Can be dismantled
- Incl. plastic support over the entire support surface
- Adjustable feet for height levelling

Article#	Width mm	Height mm	Length mm	Max capacity kg
148800	450	800	800	350

# Lifting Gear & Slings

## Vacuum Lifters



### Angle suction assembly Poly

The foldable rail can also be used to transport angled workpieces without breakage. A special design allows the rail to be adjusted to angles of 30°, 45°, 90° or 180°.

- 2 aluminium rails with joint, each 2200 mm long
- 12 suction lifters each Ø 117 mm
- Safe and unbreakable

Article#	Length mm
110242	2200

### Cordless vacuum lifter Nemo Pro

The world's first fully electric, battery-powered vacuum cleaner. Even porous and rough surfaces can be easily lifted with the Nemo Pro. Once the vacuum is reached, the pump of the 'Nemo Grabo Pro' stops automatically. If the vacuum drops, the pump automatically resumes pumping.

Set consisting of:

- 1x battery
- 1x air filter
- Spare seal
- Charger
- Hard case
- Incl. digital pressure gauge

ATTENTION: Load capacity up to 120 kg depending on the surface condition.



Article#	Surfaces	Plate mm	Voltage	Horiz. kg
149144	Polished/rough	300×180	16	120



## Mobile parking station for vacuum lifters

For gentle parking of the vacuum lifter with traverse.

- 2 fixed castors
- 1 swivel castor
- 1 extension incl. swivel castor

Article#	Width mm	Height mm	Length mm
114808	750	940	780

## Ratched Seam Setter Mammut

Suction lifter with pulling device for moving multi-part kitchen worktops or countertops. One suction lifter is fixed to each workpiece. The two workpieces are pressed together using a ratchet (joint pressing).

- Finely adjustable via screw.
- Also ideal for cementing broken workpieces.



### Quantity scale

**4 pce 10%**  
**8 pce 15%**  
**12 pce 25%**

Article#	Rubber	Suction plate mm
109566	Black	200



## Relocation help Easy-Lift

Robust steel construction for the quick conversion of the NemoGrabo vacuum lifter into a professional setting aid.

- Back-friendly and efficient moving of floor slabs
- Stone slabs can be removed and moved directly from the pallet
- The vacuum lifter is attached without tools using spring-loaded bolts
- Handle height can be adjusted according to body height
- Simple opening of the vacuum valve using the foot lever
  
- The Nemo Grabo is not included.

Article#	Weight kg	Handle distance mm	Handle mm	Handle height mm
146547	7,8	1036-1605	736	648-920

# Lifting Gear & Slings

## Vacuum Lifters



### Suction assembly Polyp

Transporting worktops or bathroom covers. Special aluminium profiles allow the suction lifters to be positioned flush and thus provide optimum safety. The suction lifters can be positioned anywhere.

- 2 aluminium rails, each 2140 mm long
- 12 suction lifters each Ø 117 mm
- Safe and unbreakable

Article#	Length mm
109411	2140

### Suction cup Compo

Powerful and robust suction lifter, especially for workpieces with light-coloured surfaces.

- Transport case included



#### Quantity scale

- 2 pce 10%
- 4 pce 25%
- 8 pce 35%

Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
122815	Grey	200	80	40

### Suction cup GRS

Handy suction lifter in aluminium design for lifting various workpieces with rough-sawn and slightly textured surfaces. Vacuum is created by folding up the handle.



Article#	Rubber	Suction plate mm	Horiz. kg
144774	Black	117	40

### Quantity scale

2 pce 15%  
4 pce 17%  
8 pce 20%



## Suction cup Porter

Powerful and robust suction lifter with high load capacity, especially for heavy and large workpieces. Can be used for all materials with a smooth surface. The vacuum can be checked at any time thanks to a corresponding warning mark. This guarantees safe working.

- Vacuum pump built into the handle
- Brass hand pump
- Transport case included

Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
108389	Black	200	100	50

## Suction cup Porter 2

Powerful and robust suction lifter with high load capacity, especially for heavy and large workpieces. Can be used for all materials with a smooth surface. The vacuum can be checked at any time thanks to a corresponding warning mark. This guarantees safe working.

- Vacuum pump built into the handle
- Brass handle
- Transport case included



### Quantity scale

2 pce 15%  
4 pce 17%  
8 pce 20%

Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
101353	Black	250	150	75

## Suction cup Porter Electric 2.0

Battery-powered suction lifter for lifting various workpieces. The Porter Electric 2.0 impresses with its digital vacuum display and high suction power. Thanks to an integrated rechargeable battery, it generates the vacuum automatically and automatically compensates for any loss of vacuum.

- Suitable for smooth and slightly rough surfaces (e.g. brushed)
- No staining on sensitive stones thanks to a grey suction plate.
- The battery is charged using a USB-C cable (mains adapter not included)
- Battery life up to 16 hours
- Incl. plastic case



Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
152375	Grey	200	120	60

# Lifting Gear & Slings

## Vacuum Lifters

### Quantity scale

4 pce 10%  
8 pce 25%  
12 pce 35%  
20 pce 45%



### Suction cup Typ 2

Handy suction lifter in aluminium design for lifting various workpieces with smooth and dense surfaces. The vacuum is created by tilting the toggle lever.

Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
104551	Black	117	80	40

### Suction cup Typ 2 GRS

Handy suction lifter in aluminium design for lifting various workpieces with smooth and rough surfaces. The vacuum is created by tilting the toggle lever.



Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
147593	Black	117	80	40

### Quantity scale

4 pce 10%



### Suction cup Typ 3

Handy suction lifter in aluminium design for lifting various workpieces with smooth and dense surfaces. The vacuum is created by tilting the toggle lever.

Article#	Rubber	Suction plate mm	Horiz. kg	Vert. kg
104552	Black	120	100	50



## Vacuum lifter T900/450 SV

For effortless, quick lifting and setting down of panels. Ideal for loading and unloading on sanding machines or saws. Perfect for in-house transport.

- Suction plate can be moved on crossbeam
- Each suction plate can be locked individually
- Each suction plate can be rotated by 90°
- Galvanised frame construction

Article#	Pressure bar	Ejector	Surfaces	Plate mm	Air l/min	Swiveling	Horiz. kg	Vert. kg	Traverse length mm
101326	5-6	Yes	Polished	540×150	120	Pneumatic	900	450	1500

## Vacuum lifter AC

Only a power connection is required to generate a vacuum. A vacuum tank guarantees that the workpieces can still be set down in the event of a vacuum loss.

- Swivelling design (by means of a lever)
- Surfaces: Polished/rough



Article#	Plate mm	Voltage	Horiz. kg	Vert. kg
127674	600×250	220	600	300
146066	700×300	380	800	400



### Vacuum lifter EP

The vacuum is generated by a hand pump, so no electricity or compressed air is required. The vacuum is controlled by an optical and acoustic warning device. The aluminium safety tank allows the workpiece to be set down even if the vacuum is lost.

- Surfaces: Polished/rough
- Hand pump: Yes

Article#	Plate mm	Horiz. kg	Vert. kg
123673	540×150	300	150
120452	600×250	600	300
118671	700×300	800	400

### Vacuum lifter EP combi

Creating vacuum by handpump or compressed air. Comes with suction cup UNI PAD which is made for rough and polish surfaces.

- Pressure bar: 5-6
- Ejector: Yes
- Surfaces: Polished/rough
- Hand pump: Yes
- Air l/min: 120



Article#	Plate mm	Horiz. kg	Vert. kg
116041	540×150	300	150
115764	600×250	600	300
118674	700×300	800	400



## Vacuum lifter T

The vacuum is generated by a compressed air ejector, so no electricity is required. An aluminium vacuum tank guarantees that the workpieces can still be set down in the event of a vacuum loss. In the event of a loss of pressure, the acoustic warning device warns the user before the panel falls.

- Pressure bar: 5-6
- Ejector: Yes
- Surfaces: Polished/rough
- Air l/min: 120

Article#	Plate mm	Horiz. kg	Vert. kg
<b>115761</b>	540×150	300	150
<b>115905</b>	600×250	600	300
<b>118656</b>	700×300	800	400



# New

## Vacuum lifter T UNI-PAD

The vacuum lifter type T in swivelling design is characterised by its uncomplicated handling. Thanks to its special design, it enables your panels to be moved effortlessly.

A vacuum safety tank ensures that the panel can be set down safely in the event of a loss of pressure. Additional safety is provided by the visual and acoustic warning device, which warns of potential dangers in good time.

- Ejector: Yes
- Surfaces: Polished/rough

Article#	Plate mm	Horiz. kg	Vert. kg
152818	540×150	300	150
152220	600×250	600	300
153136	700×300	800	400



### Vacuum lifter T UNI-Pad pivoting crosshead

Pneumatic swiveling with precise control via a joystick.

- Special vacuum safety tank ensures that the plate can be set down safely in the event of a loss of pressure.
- Additional protection through visual and acoustic warning device, which indicates potential dangers at an early stage.
- Tool-free and quick replacement of rubber seals
- Ejector: Yes
- Surfaces: Polished/rough
- Air l/min: 120
- Swiveling: Pneumatic

Article#	Plate mm	Horiz. kg	Vert. kg
152986	540×150	300	150
152987	600×250	600	300
152988	700×300	800	400


### Vacuum lifter T300 for polishes and rough-sawn surfaces

Only a compressed air connection is required to generate a vacuum. A vacuum tank guarantees that the workpieces can still be set down in the event of a vacuum loss.

- Including cellular rubber and aluminium bonnet



Article#	Pressure bar	Ejector	Surfaces	Plate mm	Air l/min	Horiz. kg	Vert. kg
109564	5-6	Yes	Polished/rough	540×150	120	300	150


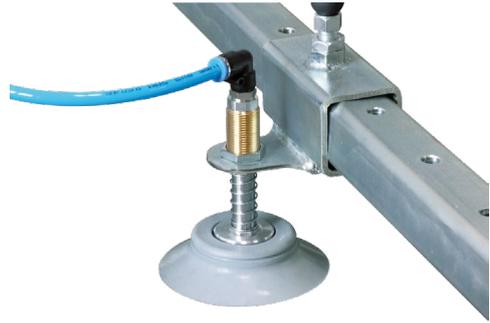


### Vacuum lifter T400/200 ceramic

Lightweight version for special use on thin materials such as Dekton, ceramics, etc.

- Pneumatic swivelling (SV)
- 15 spring-loaded aluminium suction plates each Ø160 mm
- Each suction plate can be moved on the traverse

<b>Article#</b>	137172
<b>Pressure bar</b>	5-6
<b>Ejector</b>	Yes
<b>Air l/min</b>	120
<b>Horiz. kg</b>	400
<b>Vert. kg</b>	200

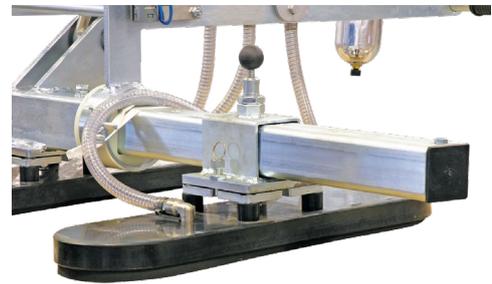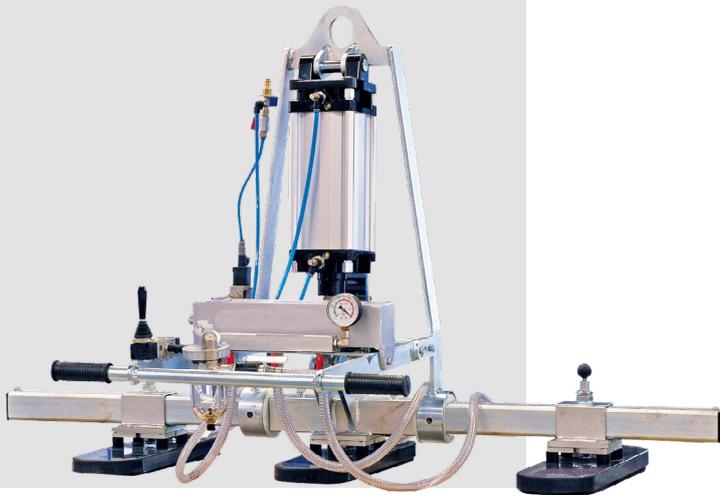

## Vacuum lifter T900/450 SV UNI-PAD

For effortless, quick lifting and setting down of panels. Ideal for loading and unloading on sanding machines or saws. Perfect for in-house transport.

- Tool-free, quick change of rubber seals
- Suction plate can be moved on crossbeam
- Each suction plate can be locked individually
- Each suction plate can be rotated by 90
- Galvanised frame construction

<b>Article#</b>	115902
<b>Pressure bar</b>	5-6
<b>Ejector</b>	Yes
<b>Surfaces</b>	Polished/rough
<b>Plate mm</b>	540×150
<b>Air l/min</b>	120
<b>Swiveling</b>	Pneumatic
<b>Horiz. kg</b>	900
<b>Vert. kg</b>	450
<b>Traverse length mm</b>	1500



### Vacuum suction plate UNI-PAD

Universal suction plate for smooth and rough surfaces.

- Rubber seal can be changed without tools
- Low maintenance and servicing costs
- Rubber seal available separately
- Hole pattern 100×100 mm

Article#	Horiz. kg
115079	300
115080	600
115081	800

### Quantity scale

- 3 pce 10%**
- 6 pce 25%**
- 10 pce 35%**



### Safety wedge

Ideally suited for safe loading and unloading of panel racks. The wedge is simply inserted between the panels, This guarantees safe insertion with the panel gripper.

- Length 255 mm
- Height 120 mm

Article#	Width mm	Weight kg	Height mm	Length mm
122817	63	0,4	120	255

### Slab lifter Jumbo II

For massive stone and smaller blocks of stone.

- With locking automatism.
- Perfect protection: jaws completely galvanized prevent scratches on the valuable materials.
- Additional protection is given by the rubber coating.
- With return springs on the jaws.



Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
109010	200×200	500-1000	500	1500



### Slab lifter Kaiman

The archetypal plate gripper. Thanks to the reinforced pressure plate, even safer handling is guaranteed. Its compact design makes it particularly suitable for removing from a panel rack. It is also ideal for particularly tightly stored panel stacks.

- Manual opening / closing by means of tension spring
- Shackle included
- Rubber colour white / black depending on type

Article#	Width mm	Gripping width mm	Rubber	Height mm	Length mm	Capacity kg
126191	152	10-30	White	354	150	1000
109686	184	10-50	Black	385	214	1300
112653	184	10-50	White	385	214	1300
101955	206	20-60	Black	425	214	1500
112654	206	20-60	White	425	214	1500
109538	220	250-500	Black	425	214	1500
101954	220	30-75	White	425	214	1500



## Slab lifter Kaiman compact automatic

The Kaiman 30 compact auto panel gripper is particularly suitable for narrow panel stacks thanks to its design. The pressure plate has been reinforced again for safe handling.

- With automatic locking
- Rubber: White

Article#	Width mm	Gripping width mm	Height mm	Length mm	Capacity kg
151557	169	0-30	365	350	500
153290	185	0-50	477	500	700

## Slab lifter Kaiman Keramos automatic

Especially for fragile material. The locking mechanism works fully automatically, so no second person is required to operate it. All contact surfaces are covered with non-slip and wear-resistant rubber.

- Compact design
- Well suited for narrow panel stacks
- With automatic locking mechanism
- Rubber: White



Article#	Width mm	Gripping width mm	Height mm	Length mm	Capacity kg
148419	122	0-20	262	316	500
151554	138	0-30	350	490	1000

# Lifting Gear & Slings

## Slab Lifters



### Slab lifter Kaiman white automatic

Lightweight, compact design with reinforced pressure plate for even safer handling. Particularly suitable for narrow panel stacks. The automatic locking system eliminates the need to manually close/open the plate gripper.

- With automatic locking
- Rubber: White
- Length mm: 214

Article#	Width mm	Gripping width mm	Height mm	Capacity kg
148451	184	10-50	385	1300
148453	206	20-60	425	1500

### Slab lifter R1000

Robust slab gripper for higher loads with galvanised surface.

- Gripper jaws and parts that come into contact with the stone are completely rubber-coated.
- A return spring is integrated to keep the jaws vertical.
- An automatic locking mechanism (protected by law) replaces the manual locking mechanism when the workpiece is set down.



Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
104542	200x200	20-200	820/640	1000




### Slab lifter R1000 Jumbo

The ideal gripper for lifting and moving workpieces that require a large clamping range, such as block steps or concrete blocks.

- Gripper jaws in wear-resistant, vulcanised design.
- Practical guide handle for safe control during the lifting process.
- Rubber strip to protect the edges of the workpiece.
- Quick and safe adjustment of the required gripping width.

Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
107107	200x200	250-500	1130/640	1000

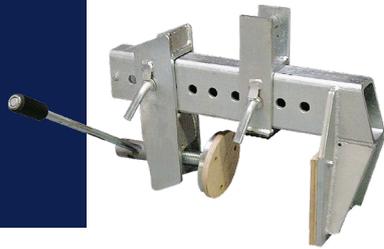

### Slab lifter R1000+

Proven gravestone gripper for moving and setting up workpieces.


- The gripper jaw is pressed against the stone using a long clamping lever, thus maximising safety.
- The suspension eye can be easily adjusted to balance the centre of gravity.

Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
104541	170x160	280	370	1000

### Slab lifter R1500

Robust plate grippers for higher loads with galvanised surface.

- Gripper jaws and parts that come into contact with the stone are completely rubber-coated.
- A return spring is integrated to keep the jaws vertical.
- An automatic locking mechanism (protected by law) replaces the manual locking mechanism when the workpiece is set down.

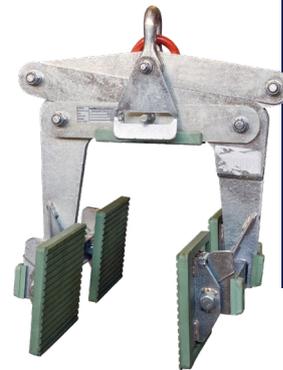

Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
104543	200x200	20-200	850/640	1500



### Slab lifter R400

Very handy and lightweight slab gripper with small dimensions and galvanised surface.

- Gripper jaws and parts that come into contact with the stone are completely rubber-coated.
- A return spring is integrated to keep the jaws vertical.
- An automatic locking mechanism replaces the manual locking mechanism when the workpiece is set down.

Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
104538	150x100	20-140	420/300	400

# Lifting Gear & Slings

## Slab Lifters



### Slab lifter R400 Twin

Very handy and lightweight slab gripper with small dimensions and galvanised surface.


- Gripper jaws and parts that come into contact with the stone are completely rubber-coated.
- A return spring is integrated to keep the jaws vertical.
- An automatic locking mechanism replaces the manual locking mechanism when the workpiece is set down.

Article#	Gripping surface mm	Gripping width mm	Height mm	Capacity kg
104540	400x100	20-140	390/280	800

### Slab lifter Riba

Light and handy slab gripper for vertical transport of natural stone slabs. A cable guide guarantees easy handling of the slabs.

- Rubber-coated gripper jaws

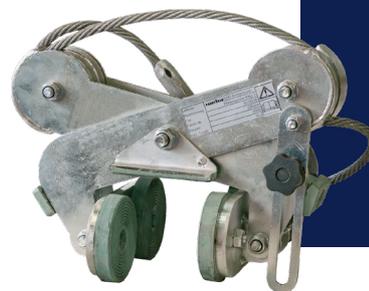

Article#	Pressure plates	Gripping width mm	Height mm	Capacity kg
107989	4	0-75	300	500
126807	8	0-170	400	1200
107991	12	0-270	500	1400



### Slab lifter Giant ceramic

Our Giant plate gripper is ideal for thin, fragile materials. The wide gripper jaws enable optimum pressure distribution on the material to be lifted.

- With automatic locking mechanism
- Incl. guide rods for stop

Article#	Width mm	Gripping width mm	Rubber	Height mm	Length mm	Capacity kg
151556	265	4-20	White	560	780	300

### Quantity scale

- 4 pce 10%
- 8 pce 25%
- 12 pce 35%



## Lifting belt endless

Textile endless sling with two loops for quick and uncomplicated moving or lifting of workpieces with the aid of a reversible hanger.

- Maximum work safety, as there are no interfering connecting seams
- Cross-section 75×8 mm
- Capacity kg: 2000

Article#	Length mm
104616	2000
104618	3000
104619	3500
104620	4000
104622	5000

## Lifting belt with loops

Textile sling including two loops for quick and uncomplicated moving and lifting of workpieces.

- Double stitched
- 8-fold safety
- Can be used on 2 sides
- With abrasion protection on both sides
- Loops sewn very tightly, therefore also suitable for smaller load hooks



Article#	Length mm
104623	2000
104624	2500
104625	3000
104626	3500
104627	4000
104628	4500
104629	5000

# Lifting Gear & Slings

## Lifting Straps & Belts



### Lifting belt with loops

Textile sling including two loops for quick and uncomplicated moving and lifting of workpieces.

- Double stitched
- 8-fold safety
- Can be used on 2 sides
- With abrasion protection on both sides
- Loops sewn very tightly, therefore also suitable for smaller load hooks
- Capacity kg: 1000

Article#	Length mm	Profile mm
105821	2500	75×4,5
105823	3000	60×4,5
105822	3500	75×4,5
105824	4000	75×4,5
152307	5000	75×4,5

### Mammut sling

Textile endless sling for quick and uncomplicated moving and lifting of workpieces.

- Polyester material
- 8-fold safety
- Extremely light, soft and safe
- Capacity kg: 2000



#### Quantity scale

4 pce	10%
8 pce	25%
12 pce	35%
20 pce	45%

Article#	Length mm
104634	2000
104635	3000
104636	4000
104638	6000



## Retractor Roll it for lashing straps

Our belt retractor „Roll it“ allows you to easily roll up tension belts.

- Suitable for belts up to 50 mm width
- Fits into any standard machine chuck.
- Galvanized

Article#	Tool holder	Width mm	Weight kg	Length mm
150733	6 mm	80	0,67	220



### Battery-powered hoist WH500

The WH500 hoist sets new standards in the field of traditional hoists. With its innovative technology, it enables heavy loads to be lifted effortlessly at the touch of a button. It proves to be extremely practical and efficient, especially in areas without a power connection.

- Delivery includes 2 5AH batteries, a quick charger and a transport case
- The battery runtime at rated load is 25 min
- Thanks to its low weight and transport case, the hoist can also be used on the move
- Supplied ready to use, including control switch and chain container

Article#	Capacity kg
153672	500

### Clamp for borders

Perfect pliers for moving edgings or kerbs.

- Maximum immersion depth 190 mm
- Handles fitted with rubber
- Hot-dip galvanised



Article#	Gripping width mm
102102	0-430



### Clamp Gecko V3

Lifting gear for convenient transport of stone slabs

- Non-slip inner coating for safe and material-friendly use
- Dead weight of the workpieces is converted into clamping force

Article#	Capacity kg per piece	Weight kg	Gripping surface mm	Clamping range mm
148766	80	4	112×240	5-45



## Forklift eye hook

For sliding onto the fork, locking screw to prevent slipping, swivelling crane hook with safety catch.

- Galvanised finish

Article#	Width mm	Fork openings mm	Height mm	Capacity kg
105482	135	185×85	75	1000

## Hoist Mini

Extremely compact hoist of the new generation. Thanks to its slim design, it has a particularly low weight.

- Material: Galvanized steel
- Galvanized operating chain
- Hook travel 3000 mm



Article#	Max capacity kg
153024	500



## Hoists for portal crane

Simple operation

- Low design with overload protection
- Galvanised hand chain
- Chain box

Article#	Capacity kg
108571	1000
104534	1500

# Lifting Gear & Slings

## Other Lifting Equipment



### Manipulator gear 1000 kg

For crane operation, for easy and safe turning of stones. Lockable castors, prevents the load from spinning independently during transport.

- Lifting straps not included in the scope of delivery

Article#	Width mm	Height mm	Roll width mm	Capacity kg
104558	660	500	90	1000

### Manipulator gear 1500 kg

Laterally adjustable lifting eyes for crane and forklift operation. Lockable castors, prevents the load from spinning during transport. Castors can be swivelled sideways, forklift pick-up adjustable.

- Lifting straps not included in scope of delivery



Article#	Width mm	Height mm	Roll width mm	Capacity kg
104559	1340	520	90	1500



### Safety double hook

It's so easy to turn your single hook into a double hook.

- Crane eye 90×60 mm

Article#	Capacity kg
115072	1000
115073	1500

**Quantity scale**

- 4 pce 10%**
- 8 pce 25%**
- 12 pce 35%**



**Stone lifter 20 - 140 mm**

2 lifting handles connected to each other by an axle. Rubber handles on the hand side, PVC protection on the load side to prevent scratching of the stone.

Article#	Gripping width mm
104550	20-140

**Stone lifter 20 - 160 mm**

2 lifting handles, which are connected to each other by an axle. Rubber handles on the hand side, PVC protection on the load side to prevent scratching of the stone.



**Quantity scale**

- 2 pce 10%**

Article#	Gripping width mm
104549	20-160



### Edge protectors

Protects the edges of the packaged goods when securing the strapping band

- Optimum pressure distribution thanks to the wide contact surface of the edge protection corner
- Reliably prevents the strapping from slipping

Article#	Band width mm	Pack. unit
109919	25	1000

### Lashing strap 4 tons

For securing the load on the lorry. For transporting slabs and stones during operation.

- Band width mm: 50
- Length mm: 8000
- Capacity kg: 4000




#### Quantity scale

- 4 pce 10%
- 8 pce 25%
- 12 pce 35%

Article#	System
104639	1-piece
104640	2-piece

**Quantity scale**

- 4 pce 10%**
- 8 pce 25%**
- 12 pce 35%**
- 16 pce 40%**

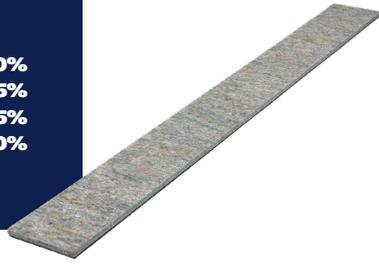

**Magnet protection mat**

Protects slabs and gravestones during transport.

- Self-adhesive due to moulded-in magnetic strips

Article#	Width mm	Height mm	Length mm
106085	100	11	1000
106952	80	10	1000
115731	100	11	1200

**Polyester strapping**

Secure your load easily and safely against slipping.



**Quantity scale**

- 3 pce 5%**
- 5 pce 10%**
- 10 pce 20%**

Article#	Length mm	Capacity kg	Pack. unit
101391	60000	880	1



**Portable dispenser**

With the portable dispenser for polyester strapping, you will never lose your sealing clips again.

- For use with our Securo strapping set
- Incl. safety plug
- Incl. PVC box for sealing clips

Article#	Width mm	Weight kg	Height mm	Depth mm
107231	325	3	460	345



### Reinforcing rail

Safe transport of workpieces with cut-outs. The workpieces are secured using star screws and an aluminium strip.

- Includes felt to protect against scratches
- Clamping range 0-40 mm

Article#	Length mm
148024	2000

### Sealing clips for polyester strapping band

Sealing clips suitable for our Securo strapping set. Suitable for use with our dispenser and tensioner.

Content: 1000 pieces



Article#
126391



### Strapping set SECURO

For quick and practical lashing of transported goods.

Set includes:

- 1 piece portable dispenser with staple box
- 1 piece of polyester strapping tape
- 1000 sealing staples
- 1 piece tensioning device

Article#	Length mm	Profile mm	Capacity kg
107327	10000	15×0,45	160



## Strapping SET Securo 4-piece mobile

For quick and practical lashing of transported goods.

Set includes:

- 1 piece portable dispenser with staple box
- 1 piece of polyester strapping tape
- 1000 sealing staples
- 1 piece tensioning device

Article#

149527

## Tensioning device for strapping band

For lashing goods using polyester strapping and suitable sealing clips.



Article#

107230

Colour

Red

# Material Handling

## Slab & Cut Stone Racks

### Quantity scale

6 pce 10%  
10 pce 15%



### A-frame Secur

For stacking natural stone slabs in the warehouse. Significantly improved work safety in conjunction with optional safety support.

- Oversized slabs can be secured during removal
- Galvanised version

Article#	Width mm	Height mm	Length mm
104555	40	1300	2000

### Connection bar for A-frame Secur

For easy connection of 2 Secur. panel supports.

- Galvanised version



### Quantity scale

2 pce 10%  
3 pce 25%

Article#	Width mm	Height mm	Length mm
107445	50	30	2000




### Remnant rack Relico

Ideally suited for the storage of remnants, production parts such as window sills, kitchen worktops, etc. Also suitable for in-house interim storage. Also for in-house temporary storage.

- Set: 20 tubes & 2 rails
- Galvanised finish
- Round tubes

Article#	Tube length mm	Rail length mm
125423	750	2400

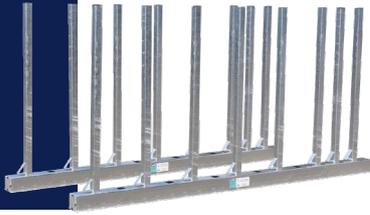

## Slab Rack Bison

Safe stacking of natural stone slabs, prevents breakage and accidents. Easy removal of the stone material using a slab gripper. High stability thanks to heavy base rails and the use of square tubes. Spacer brackets at the ends of the tubes guarantee an optimum angle of inclination for the standard-size slabs.

- Set: 16 tubes & 2 rails
- Galvanised finish
- Square tubes
- Material thickness 4 mm

Article#	Tube length mm	Rail length mm
115161	1500	3000

## Slab Rack Iraxx

Safe stacking of natural stone slabs, prevents breakage and accidents. Easy removal of the stone material using a slab gripper. High stability thanks to heavy base rails and use of square tubes.

- Simple connector for connecting 2 rails
- Spacer at the end of the tube
- Hot-dip galvanised
- White rubber caps



Article#	Tube length mm	Rail length mm
137328	1500	3000



## Slab storage racks Round Tube

Safe stacking of natural stone slabs, prevents breakage and accidents. Easy removal of the stone material using a slab gripper. High stability stability due to heavy base rails and use of round tubes.

- Galvanised version
- Round tubes
- Rail length mm: 3000

Article#	Tube length mm
104741	1000
104742	1500



### Slab storage racks trapezoidal

For stacking natural stone slabs in the warehouse.

- Reinforced, lacquered version
- U-profile
- Width mm: 65
- Height mm: 1485

Article#	Length mm
115203	1500
101370	2000

### Support for slab stand Secur

Significantly improved work safety.

- Galvanised version



Article#	Width mm	Length mm
108521	60	1000



### Transport and storage trestle

Several raw panels can be stored on the storage rack. If one or more panels are required, the entire pallet can be moved with the forklift. An integrated perforated rail prevents the stored panels from slipping away.

- 4 safety supports, each 1000 mm long
- Hot-dip galvanised design

Article#	Width mm	Height mm	Depth mm	Capacity kg
107815	1500	1600	960	5000



## Aluminum gantry crane IP

The bestseller for cemeteries and workshops. Perfectly suited for loading and unloading as well as easy moving of gravestones. Thanks to the simple combination of plug-in parts, it is extremely quick to assemble.

- Infinitely adjustable working width
- Working height adjustable from 1995mm-3520mm
- Easy transport and assembly
- Each support leg can be adjusted individually
- Including trolley (reel trolley)
- Design height mm: 2295-3520
- Stand width mm: 1715
- Lower edge mm: 1995-3220

Article#	Weight kg	Rail length mm	Capacity kg
108091	169	5000	1000
108090	157	4000	1500
108797	165	4000	2000



### Aluminum gantry crane LW3000

The LW3000 gantry crane is characterised by its light weight and mobility. Thanks to its special design and low weight, it can be assembled by just one person. Additional wheels allow the gantry crane to be moved without a load.

- Overall construction made of aluminium
- Simple assembly and disassembly using quick-release fasteners
- Delivery incl. trolley
- Gantry crane can be completely folded up and moved
- Height adjustable 1856-2450 mm

<b>Article#</b>	153023
<b>Weight kg</b>	40
<b>Rail length mm</b>	3000
<b>Stand width mm</b>	1600
<b>Capacity kg</b>	500
<b>Lower edge of cantilever mm</b>	2250



## Aluminum gantry crane Split

For cemeteries and workshops, for loading and unloading and for moving gravestones.

- Only a very small loading area is required for transport
- Folding side sections including PVC joint
- Easy transport and assembly
- Infinitely adjustable working width
- Each support leg is individually adjustable
- Aluminium rail for folding
- Including reel chassis

<b>Article#</b>	109153
<b>Design height mm</b>	2295-3520
<b>Weight kg</b>	200
<b>Rail length mm</b>	4000
<b>Stand width mm</b>	1715
<b>Capacity kg</b>	1500
<b>Lower edge mm</b>	1995-3220



## Aluminum tripod with winch

Lightweight aluminium crane with integrated cable winch and centre of gravity shift.

- Incl. cable winch and swivelling load hook
- Quick assembly without tools
- Telescopic and foldable legs
- Foot length adjustment using hand cranks and pins
- Easy transport even on unpaved ground thanks to double tyres with a diameter of 260 mm
- Lashing straps for safe storage and transport

Foot A:

- Max. floor space Ø 2520 mm
- Total height 1800-2230 mm

Base B:

- Max. floor space Ø 1380 mm
- Total height 1990-2460 mm

<b>Article#</b>	146972
<b>Tires mm</b>	260×85
<b>Weight kg</b>	42
<b>Capacity kg</b>	300
<b>Shipping dim. mm</b>	2100×300×350



## Gantry crane Picco

This crane is particularly characterised by its handy design. When dismantled, the device can be easily moved using a wheel axle. Adjustable feet ensure optimum levelling.

- Includes chassis and drawbar for transport
- Each support leg is individually adjustable
- Aluminium rail for folding
- Folding side sections

Article#	Design height mm	Weight kg	Rail length mm	Stand width mm	Capacity kg	Lower edge mm
109572	3000	80	3500	1600	500	2800


## Mobile pillar jib crane WT

This column-mounted slewing jib crane can be used universally. The crane can be moved using a forklift truck. The crane can of course be supplied with a different load capacity, height or radius, please enquire.

- Sturdy steel construction for mobile use in the hall
- Ball-bearing mounted profile jib type IPE
- Adjustable slewing resistance
- Powder-coated surface
- Swivelling range 270 degrees
- On and off switch on column
- Power trolley made of plastic
- Manual trolley included
- Supplied without electric chain hoist (optionally available)



Article#	Throat mm	Design height mm	Hook path mm	Max capacity kg	Capacity kg	Lower edge of cantilever mm
152737	3000	3600	2900	125	500	2950

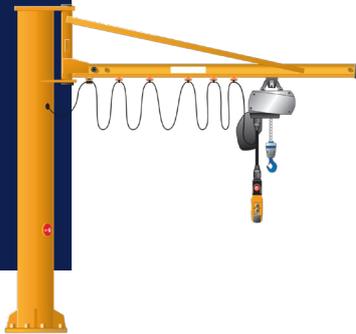

## Pillar jib crane LS

Profile bracket made of robust hollow steel profiles in a lightweight design.

- Painted in RAL 1007 daffodil yellow
- Operating voltage: 3/PE~50 Hz 400 V
- Control type: Direct control
- Protection class: IP55
- Electric chain hoist 500 kg
- Painted in RAL 5017 traffic blue
- Lifting 2-stage
- Duty cycle: 60%ED
- Switches: 360 c/h
- Attachment using anchor rods and template

Article#	Throat mm	Design height mm	Crossing	Slewing range °	Swiveling	Capacity kg
136904	4000	3300	Manual	270	Manual	500



### Pillar jib crane WT

Sturdy steel construction for indoor use.

- Round column
- Ball bearing mounted profile boom type IPE
- Adjustable swivelling resistance
- Powder-coated surface
- Swivelling range 270 degrees
- On and off switch on column
- Plastic power trolley
- Power supply to chain hoist (flat cable)
- Electric chain hoist with 2 lifting speeds 1/4 m /min
- Manual trolley included
- Including anchor material
- Design height mm: 3600
- Hook path mm: 3000

Article#	Throat mm	Capacity kg	Capacity kg/Jib length mm	Lower edge of cantilever mm
146962	5000	1000	1000/5000	3220
146957	5000	500	500/5000	3280
146961	7000	500	500/7000	3220


### Pillar jib crane WT with knuckle boom

Sturdy steel construction for indoor use

- Articulated boom at 3000mm
- Round column
- Ball-bearing-mounted profile jib type IPE
- Adjustable swivelling resistance
- Powder-coated surface
- Swivelling range 270 degrees
- On and off switch on column
- Plastic power trolley
- Power supply to chain hoist (flat cable)
- Electric chain hoist with 2 lifting speeds 1/4/ m / min
- Manual trolley included
- Including anchor material



Article#	Throat mm	Design height mm	Hook path mm	Capacity kg	Lower edge of cantilever mm
149114	6000	4000	3400	500	3730

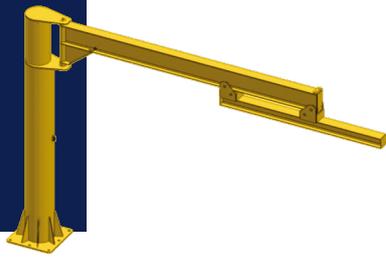

## Pillar jib crane WT with telescopic boom

Sturdy steel construction for indoor use.

- Round column
- Ball bearing mounted profile boom type IPE
- Adjustable swivelling resistance
- Powder-coated surface
- Swivelling range 270 degrees
- On and off switch on column
- Plastic power trolley
- Power supply to chain hoist (flat cable)
- Electric chain hoist with 2 lifting speeds 1/4 m /min
- Manual trolley included
- Including anchor material

Article#	Throat mm	Design height mm	Hook path mm	Capacity kg	Lower edge of cantilever mm
150482	5000	3600	3000	500	3220

## Trolley for aluminum rail IP

Our powerful trolley for gantry cranes. With a load capacity of 1500 kg and a flange width of up to 80 mm, it is the ideal solution for your lifting requirements. Perfect for professional use, this trolley offers reliability and efficiency in every application.



Article#	Max capacity kg
108086	1500



### Conversion kit for transport pallet

For the transport of stacking pallets.

- 2 swivel castors Ø 200 mm with parking brake
- 2 fixed castors Ø 200 mm
- Drawbar included

Article#	Width mm	Loading height mm	Length mm	Capacity kg
105474	840	300	1500	800

### Gravestone shelf Quick

For a clean and tidy warehouse with optimum utilisation of space, even upwards.

- 5 levels
- Galvanised finish
- 800 kg load capacity per level
- Support arms with wooden support
- Support arms with plug-in connections
- Easy to drive in with the forklift



#### Quantity scale

- 2 pce 10%
- 3 pce 15%
- 4 pce 20%

Article#	Adjustable width mm	Height mm	Length mm	Capacity kg
107375	700-1500	3000	1100	4000

#### Quantity scale

- 2 pce 10%



### Shelf Solo

For a clean and tidy warehouse, with optimum utilisation of space, even upwards.

- 4 levels
- Distance arm/arm 270 mm
- Easy to set up
- Galvanised finish
- 600 kg load capacity per level
- Shelving elements stand freely
- Shelf row can be extended as required
- Variable and quickly adjustable positioning width
- 2 uprights are required for use

Article#	Width mm	Height mm	Length mm	Capacity kg
110927	1000	1310	880	2400

**Quantity scale**

- 24 pce 8%**
- 48 pce 17%**
- 96 pce 26%**



**Stacking cylinder**

For the storage of tranches and gravestones. As a replacement for conventional wooden planks. Made from hard-wearing plastic.

Article#	Width mm	Height mm	Capacity kg
104553	80	100	11700

**Stacking pallet**

Steel construction with wooden insert for gentle storage of cuttings, window sills and similar items.

- 4 crane hooks
- Galvanised



**Quantity scale**

- 2 pce 10%**
- 4 pce 15%**

Article#	Width mm	Height mm	Loading height mm	Length mm	Capacity kg
104532	600	880	670	1500	1200

**Quantity scale**

- 2 pce 10%**
- 4 pce 15%**
- 8 pce 25%**



**Stacking transport pallet**

Transport with forklift truck or crane beam (4 hooks) possible.

- 2 removable supports for easy loading
- Robust steel construction
- Clad with wood

Article#	Width mm	Height mm	Loading height mm	Length mm	Capacity kg
104533	840	840	600	1480	1200



### Boom Amigo Type 1

Convert your forklift truck into a mobile crane arm. Telescopic, 4-way height-adjustable, ideal for many loading and transport tasks.

- Support device
- Galvanised finish
- Universal for every forklift truck
- Safety chain to prevent slipping
- More free lift height thanks to new hook arrangement
- Load hook included
- Forklift tines maximum 180×80 mm

Article#	Throat mm	Fork openings mm	Max capacity kg
101371	3450	184×84	2500

### Boom Amigo Type 2

Convert your forklift truck into a mobile crane arm. Telescopic, 4-way height-adjustable, ideal for many loading and transport tasks.

- Support device
- Galvanised finish
- Universal for every forklift truck
- Safety chain to prevent slipping
- More free lift height due to hook arrangement



Article#	Throat mm	Fork openings mm	Max capacity kg
106375	4500	184×84	2500

### Boom rigid

Simple, very robust crane arm with swivel hook, safety chain and support foot.

- Crane hook adjustment via ratchet
- Galvanised design
- Without extension



Article#	Throat mm	Fork openings mm	Max capacity kg
101368	2090	184×84	2400

## Boom rigid with expulsion

Simple, very robust crane arm with swivel hook, safety chain and support foot.

- Load hook included



Article#	Throat mm	Fork openings mm	Max capacity kg
108251	3400	184×84	2400

## Snowblade for forklift

Robust snow blade including rubber scraper blade for attachment to almost any forklift truck.

- Quick and easy to fit
- Anti-slip protection included
- 2-fold angle adjustment to both sides (10° / 20°)



Article#	Width mm	Fork openings mm	Height mm	Length mm
111115	675	200×100	660	1500

# Material Handling

## Transport Racks

### Quantity scale

- 2 pce 10%
- 3 pce 15%



## Adjustable transport pallet

For the safe transport and storage of fragile workpieces such as kitchen worktops and bathroom worktops. The workpieces stand or lie on wooden profiles and are secured with three adjustable, rubber-cushioned clamping elements. The support at the rear is adjustable and can be adapted to the amount of load.

- Pick-up device for transport with forklift truck
- Galvanised

Article#	Width mm	Height mm	Loading height mm	Length mm	Capacity kg
107667	860	870	600	1390	1000

## Conversion kit Mobilo

With the help of this additional equipment, the transport frame can easily be pulled by one person. The drawbar and wheels can be attached to the frame when not in use. Ideal for loading by lorry and later transport by drawbar.

Consisting of:

- 2 plug-in wheels Ø 200 mm
- 1 drawbar



Article#

107814



## Conversion kit Mobilo II

Mobile for in-house use even without a forklift or pallet truck.

- Set consisting of 4 swivel castors Ø200 mm each

Article#	Weight kg	Height mm
133275	20,12	348

**Quantity scale**

**2 pce 10%**  
**3 pce 15%**



**Double sided A-frame**  
**2000/1100**

Versatile transport rack for fragile workpieces such as kitchen worktops or bathroom worktops. The boards rest or stand on special rubber profiles and are secured with eight adjustable, rubber-cushioned clamping elements. Tipping is no longer possible.

- Forklift shoes for all sides
- 8 clamping slats including rubber pad
- Support surface per side: approx. 420 mm
- Can be dismantled

Article#	Support surf. mm	Width mm	Rubber	Loading height mm	Length mm	Capacity kg
107032	420	1100	Transparent	1180	2000	1500

**Double sided A-frame**  
**2000/800**

Versatile transport rack for fragile workpieces such as kitchen worktops or bathroom worktops. The boards rest or stand on special rubber profiles and are secured with eight adjustable, rubber-cushioned clamping elements. Tipping is no longer possible.

- Forklift shoes for all sides
- 8 clamping slats including rubber pads
- Can be dismantled



**Quantity scale**

**2 pce 10%**  
**3 pce 15%**

Article#	Width mm	Rubber	Loading height mm	Length mm	Capacity kg
103151	800	Transparent	850	2000	1500

**Quantity scale**

**2 pce 10%**  
**3 pce 15%**  
**8 pce 25%**



**Double sided A-frame**  
**2400/1100**

Versatile transport rack for fragile workpieces such as kitchen worktops or bathroom worktops. The boards rest or stand on special rubber profiles and are secured with ten adjustable, rubber-padded clamping elements. No tipping possible.

- Forklift shoes for all sides
- 10 clamping slats including rubber pads
- Can be dismantled

Article#	Width mm	Rubber	Loading height mm	Length mm	Capacity kg
102330	1100	Transparent	1470	2400	1500

# Material Handling

## Transport Racks

### Quantity scale

- 2 pce 10%
- 3 pce 15%
- 8 pce 25%



## Double sided A-frame 2500/1100

Versatile transport rack for fragile workpieces such as kitchen worktops or bathroom worktops. The panels lie or stand on special rubber profiles and are secured with ten adjustable, rubber-cushioned clamping elements. Tipping is no longer possible.

- 10 clamping slats including rubber pad

Article#	Width mm	Rubber	Loading height mm	Length mm	Capacity kg
103153	1100	Transparent	1200	2500	1500

## Pallet rack

With this special pallet attachment, any Euro pallet can be quickly converted into a transport rack.

- Support area complete with rubber pads
- Extremely space-saving and can be dismantled
- Includes 2 tensioning straps
- Support per side 345 mm



### Quantity scale

- 2 pce 10%
- 4 pce 15%
- 8 pce 25%

Article#	Width mm	Rubber	Loading height mm	Length mm
110527	800	Black	750	1200

### Quantity scale

- 6 pce 10%
- 12 pce 25%
- 18 pce 35%
- 24 pce 45%



## Pallet rack Europ

Turn your Euro pallets into safe transport options for cuttings and stairs.

- Easy handling
- Reusable
- Safe transport
- Variable use

Article#	Rubber	Loading height mm
107818	Black	730

**Quantity scale**

**2 pce 10%**  
**3 pce 15%**



**Single-sided A-frame  
2000/670**

Version with only one support surface, e.g. for use in closed vans. The panels stand or lie on special rubber profiles and are secured with four adjustable rubber-padded clamping elements.

- 4 clamping slats including rubber pad
- Can be dismantled

Article#	Width mm	Rubber	Loading height mm	Length mm	Capacity kg
107279	670	Transparent	1180	2000	1500

# Material Handling

## Transport Rollers & Trolleys

### Quantity scale

2 pce 5%  
5 pce 10%



## Adapter for cordless screwdriver


Adapter piece for quick height adjustment of the WTR500 scissor lift transport trolley using a standard cordless screwdriver.

Article#	Tool holder	Length mm
147810	M10	97

## Caps for claws WTR

Protects your stone slabs from slipping and scratching during transport by means of claws.

- Openings approx. 40×20 mm
- Length 120 mm
- Width 27 mm

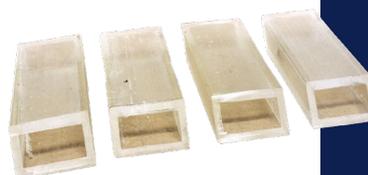

Article#	Width mm	Length mm
104632	27	120



## Cart for hand truck WTR 1000/1001

With this front trolley, you can convert your transport trolley into a versatile four-wheel trolley in no time at all.

- Swivelling drawbar
- 2 steerable pneumatic wheels

Article#	Tires mm	Capacity kg
104514	260×85	1000



## Connetion kit for slab trolley

The weight of the natural stone slab is automatically clamped by a special mechanism. The drawbar makes it easy to move.

- Clamping jaws and support covered with rubber
- 2-part

Article#	Length mm
101332	250

## Hand truck TR 500

Lightweight and easy to handle, but extremely stable tubular construction

- Hand-friendly plastic handles
- Handles with rubber pad
- Vulcanised bucket
- Powder-coated



Article#	Tires mm	Weight kg	Handle mm	Height mm	Blade mm	Track width mm	Capacity kg
104509	260×85	28,5	510	1210	450×200	620	500



## Hand truck TR 750

Transport trolley in robust steel construction with non-slip rubber handles and practical parking supports.

- Wooden support on the uprights
- Rubberised support surface

Article#	Tires mm	Height mm	Blade mm	Track width mm	Capacity kg
145364	400×100	1200	425×55	640	750



### Hand truck WTR 1000

Universal transport trolley with shifting centre of gravity in sturdy tubular construction. Swivelling claws with vulcanised rubber coating.

- 2 wooden supports

Article#	Tires mm	Handle mm	Height mm	Track width mm	Capacity kg
102343	400×100	600	1560	720	1000

**New**

## Hand truck WTR 1000E

The innovative WTR 1000E transport trolley is characterised by its advanced electric drive.

Thanks to the electric drive, the transport trolley can be moved effortlessly even on rough terrain. With the optional front trolley, the transport trolley can also be easily converted into a trolley for horizontal transport.

- Charger included for convenient battery charging
- Differential gear for smooth and optimal manoeuvrability
- Electronic parking brake for safe positioning of the transport trolley when stationary
- Adjustable speed using a practical rotary control
- Forward and reverse gear for maximum handling flexibility
- Cycle-proof lead-gel batteries for extra long service life



<b>Article#</b>	153202
<b>Tires mm</b>	400×100
<b>Handle mm</b>	600
<b>Height mm</b>	1560
<b>Track width mm</b>	720
<b>Capacity kg</b>	1000



### Hand truck WTR 1001

Universal transport trolley with shifting centre of gravity in sturdy tubular construction. Swivelling claws with vulcanised rubber coating.

- 2 wooden supports

Article#	Tires mm	Handle mm	Height mm	Track width mm	Capacity kg
104513	400×100	600	1560	460-660	1000

### Hand truck WTR 500 with lifting device

Universal transport trolley for the safe and easy transport of gravestones or similar workpieces. Thanks to the built-in scissor lift, the device can also be used for loading and unloading lorry platforms.

- 2 wooden supports
- Lightweight and easy to handle
- Height adjustment by hand crank
- Serves as a stationary work platform
- Extendable handles for better stability when lying down



Article#	Tires mm	Handle mm	Height mm	Blade mm	Track width mm	Capacity kg
112487	400×100	650	455 - 900	500×80	650	500

### Hand truck WTR 600 Runner +

Universal transport trolley with sturdy tubular construction.

- Ideal handle height
- Ideal handle width
- White rubber tyre
- Hot-dip galvanised design



Article#	Tires mm	Weight kg	Handle mm	Rubber	Height mm	Blade mm	Track width mm	Capacity kg
149267	300	24	468	Transparent	1265	410×75	650	600



## Hand truck WTR 801 with track-adjustment

Universal and practical transport trolley with shifting centre of gravity, can be fixed in any position. Swivelling claws with vulcanised rubber coating.

- 2 wooden supports

Article#	Tires mm	Handle mm	Height mm	Track width mm	Capacity kg
104510	300×100	550	1340	395-590	800

## Slab dolly incl. reinforcing rail

Super-light means of transport made of aluminium for safe and and above all back-friendly transport of individual kitchen worktops kitchen worktops, counter tops or bathroom covers. For fragile materials, the stiffening rail is clamped into the support shoe. This means that the workpiece together with the plate dog can also be carried comfortably over a step or a step.



Technical data plate dog:

- Weight: 12.5 kg
- 2x pneumatic wheel Ø 260 mm
- Height adjustment: 500-750 mm
- Track width: 437 mm
- Clamping range: 10-90 mm
- Support length: 400 mm
- Load capacity: max. 500 kg

Technical data stiffening rail:

- Length: 2000 mm
- Clamping range: 0-40 mm
- Weight: 6.5 kg
- 4 clamping screws
- Contact surfaces covered with felt

Article#	Support surf. mm	Weight kg	Clamping range mm	Length mm	Capacity kg
152328	2000×40	19	0-40	2000	500

# Material Handling

## Transport Rollers & Trolleys



### Slab trolley 500 kg

For transporting natural stone slabs. Made of sturdy U-shaped steel profile with wooden support.

Article#	Support surf. mm	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
105411	500×80	260×85	260	500	280	500

### Slab trolley Buggy

Robust trolley in a handy design for the in-house transport of cut pieces, kitchen worktops, etc. Increased stability due to large track width. All support points are covered with rubber to protect the workpieces.

- Galvanised steel construction



Article#	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
111022	260×85	1070	1400	700	500

### Slab trolley Butterfly

The weight of the natural stone slab is automatically clamped by a special mechanism. The drawbar makes it easy to move.

- Clamping jaws and support are covered with rubber
- Drawbar included



Article#	Support surf. mm	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
109571	160	260×85	860	540	570	500



## Slab trolley for narrow ways

With this device, gravestones can be easily transported even in confined spaces. Support legs are removable and can be adjusted to the width of the stone.

- Extendable drawbar
- Wooden support included

Article#	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
104517	260×85	670	1700	360	500

## Slab trolley Koloss

Our Colossus slab dog is ideal for transporting natural stone slabs / ceramic slabs.

- With high-quality clamping device
- For easy transport of slabs
- Handy, lightweight design
- With white rubber pad
- Trolley can be lifted with slab



Article#	Support surf. mm	Weight kg	Rubber	Height mm	Length mm	Track width mm	Capacity kg
151560	0-73	14	Grey	305	610	327	450



## Slab trolley Loft

Super-light means of transport made of aluminium for safe and, above all, back-friendly transport of individual kitchen worktops, counter tops or bathroom covers.

Article#	Support surf. mm	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
112330	60	260×85	550 - 800	500	420	500



### Slab trolley Swift

With the Swift slab cart, kitchen countertops, bar tops, or construction coverings can be effortlessly transported vertically to the installation site and then tilted horizontally to position them on kitchen elements. The manual swivel gear allows for easy tilting from 0 to 90 degrees. Additionally, the clamping devices ensure that the workpiece is secured against slipping. Thanks to the integrated rollers in the work area, the workpiece can be easily moved to the desired location after transport.

- Lightweight aluminum construction
- Side-adjustable roller bars to support different workpieces
- Includes 4 steering wheels Ø 160 mm
- Extendable support legs for better stability during tilting

<b>Article#</b>	102125
<b>Tires mm</b>	200
<b>Height mm</b>	835-1000
<b>Length mm</b>	1060
<b>Track width mm</b>	530
<b>Capacity kg</b>	500



## Stand for slab trolley Loft

Single-acting foot with hinged mounting part and tension spring for plate dog Loft.

Article#	Length mm
114482	400

## Trolley Multi for stone cuttings

For in-house transport, e.g. from the bridge saw to the edge sanding machine and for mobile interim storage.

The design allows workpieces to be set down without straining your back, as they do not have to be lifted over a strut.

- By tilting the laterally movable strut, shorter workpieces can also be deposited without any problems.
- Inserting the corner bracket prevents tipping backwards.
- The drawbar is hooked into the holder when not in use and is therefore neatly tidied away.



Article#	Support surf. mm	Tires mm	Height mm	Length mm	Capacity kg
105089	1050×370	280	900	1050	1400



## Trolley WTW 1500

4-wheel wagon with tilting bridge. Drawbar steered by ball bearing slewing ring. The support is automatically locked when turning from vertical to horizontal.

- Galvanised
- Foldable claws
- Drawbar parking brake
- Special wheels for high load capacity

Article#	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
104516	400×100	540	1500	700	1500



### Trolley WTW 800

Four-wheel wagon with tilting bridge. Drawbar steering with ball bearing slewing ring. The support is automatically locked when turning from vertical to horizontal.

- Foldable claws
- Drawbar parking brake

Article#	Tires mm	Height mm	Length mm	Track width mm	Capacity kg
104515	260×85	460	1100	580	800



Adapter	62	Support for slab stand	46
Angle connection	5	Tensioning device	43
Assembly table	7	Tiling table	5
Big Bag	8	Tilting device	6
Boom	56,57	Timber jack	11
Caps for claws	62	Transport and storage trestle	46
Carrying system	14,16	Transport pallet	58
Cart	62	Transport rack	59,60,61
Clamp	36	Trestle	11,12,13
Connection bar	44	Tripod	50
Conversion kit Mobilo	58	Trolley	53,71,72
Cordless vacuum lifter	14	Undercarriage	54
Crane arm	56	Vaccum lifter	19,20,21,22,23,24,25
Cutting trolley	71	Vacuum lifter	19,23
Dispenser	41	Vacuum suction plate	26
Dumper shovel	8	Work and turn buck	13
Edge protectors	40	Work table	6,7
Engraving trestle	10	Work trolley	7
Extension	10,63	Workbench	6
Forklift eye hook	37		
Gantry crane	36,47,48,49,51		
Gravestone shelf	54		
Hand truck	63,64,65,66,67		
Heavy-duty lashing	40		
Hinged container	8		
Hoist	37		
Lifting belt	33,34		
Magnet protection mat	41		
Mammut sling	34		
Manipulator gear	38		
Manual tilting transport cart	5		
Mobile tipping container	9		
Modelling stand	10		
Mortar bucket	9		
Pallet rack	60		
Panel trolley	68,70		
Parking station	15		
Pillar jib crane	51,52,53		
Polyester strapping	41		
Reinforcing rail	42		
Relocation help	15		
Retractor Roll	35		
Safety double hook	38		
Safety wedge	27		
Sealing clips	42		
Shelf	44,54		
Slab lifter	27,28,29,30,31,32,36		
Slab rack	44,45,46		
Slab trolley	69		
Slab trolley	67,68,69		
Snowblade	57		
Stacking cylinder	55		
Stacking pallet	55		
Stand for slab trolley	71		
Stone lifter	39		
Strapping set	42,43		
Suction cup	15,16,17,18		

## Still haven't found what you're looking for?

There is even more choice and offers at [weha.com](https://weha.com)



**Order before 3 pm**  
for same day dispatch




**Secure shopping**  
thanks to SSL encryption



**Parcel shipping free**  
except packing costs

**Quick help**  
via chat function





Contact details:  
weha Ludwig Werwein GmbH  
Wikingerstr. 15  
DE-86343 Königsbrunn

+49(0)8231 | 6007-0  
info@weha.com  
www.weha.com



Subject to errors, changes and technical developments.

August 2024

Only valid while stocks last.